

Superior Air Performance

Standard Construction

Frame

5" x .081"(127 x 2.1) Extruded Aluminum (6063-T5)

Blades

Drainable Style Blades, .081"(2.1) Extruded Aluminum (6063-T5) at a 45° blade angle, 2"(51) blade spacing

Finishes

MILL

Minimum Size

8" W x 14" H (203 x 356)


Maximum Size

72" W x 120" H (829 x 3048)

* One dimension (W or H) must not exceed 72"(1829)


Available Options

- Continuous Blade Construction (concealed mullions)
- Extended Sill (loose) 14 GA. Aluminum
- Blank-off Panels: Aluminum or Galvanized, Insulated or Non-Insulated
- Formed Flange and Mounting Angle up to 4"
- Birdscreen: Aluminum or Galvanized
- Insect Screen: Aluminum or Bronze
- Finishes: Prime Coat, Baked Enamel, Duranar, Duranar XL
- Anodized Finishes: Clear or Colour (Light Bronze, Medium Bronze, Dark Bronze, Black)

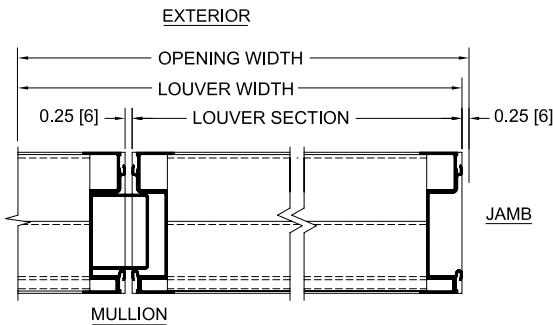

TOP VIEW - HORIZONTAL SECTION

ALL-WELDED CONSTRUCTION

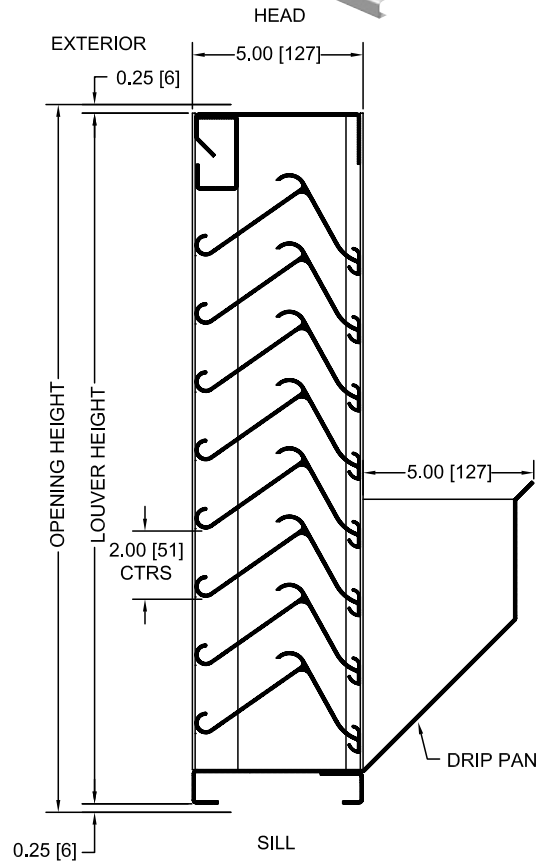

VERTICAL SECTION

PROJECT			CUSTOMER				
ARCHITECT			ENGINEER				
SPEC. SYMBOL			DATE				
QTY	TAG	LOUVER SIZE		OPENING SIZE		OPTIONS	UNITS: <input type="checkbox"/> IMPERIAL <input type="checkbox"/> METRIC
		WIDTH	HEIGHT	WIDTH	HEIGHT		